

# iRZ TG52A



The sealed iRZ TG52A GSM/GPRS modem of the Protect series is designed to provide transparent interaction between the third-party software and an external device, connected to the modem via RS485/RS232 interface. Data is transmitted over GPRS using the TCP/IP protocol stacks. iRZ TG52A features an integrated PSU for operation on the industrial power system of ~220V 50/60 Hz and a built-in battery supporting the device self-powered work if main power supply is disconnected. Maximum battery life of the modem in the “online” mode is 12 hours.

The distinctive feature of iRZ TG52A is the IP68-sealed enclosure with protection against dust and continuous immersion in water, which extends the application range of the device. Such protection rating provides smooth operation of the modem in dirty medium with high concentration of dust and other air impurities in various dispersed phases as well as with high moisture concentration. Even continuous immersion in water under pressure cannot affect the operability of iRZ TG52A!













The modem is encased in an impact-resistant industrial thermoplastic (polycarbonate) housing. It is a high density material less susceptible to thermal stress. The joints of the housing parts are filled with the silicon sealant which ensures reliable protection of internal components against dust and moisture. The modem is supplied with three IP68 cable glands to pass cables through the enclosure. Access to the circuit board connectors is gained via the housing window made of transparent thermoplastic.


iRZ TG52A automatically (without AT commands) connects to the GPRS network and establishes connection to the specified server. The modem is fitted with 1 GPO, 2 GPIOs to control the connected devices.

Dual SIM card support provides backup connectivity. The modem supports switching to the backup server both at the loss of connection to the main server and on the signal from the modem GPIOs or on SMS command.

The sealed enclosure, extended range of operating temperature (-40°C to +65°C) and input voltage make the iRZ TG52 modem indispensable for various needs requiring wireless communications and device high fault tolerance in harsh environments.

Various automatic process control systems in manufacturing, construction, and mining sites, research investigations and many other scopes can be examples of such deployment.

 DUAL-BAND	 GSM	 GPRS CLASS 10
 iRZ COLLECTOR	 DUAL-SIM	 TCP/IP CONNECTIVITY
 INDUSTRIAL INTERFACES	 WATCHDOG TIMER	 EXTENDED TEMPERATURE RANGE
 IP68	 BUILT-IN POWER SUPPLY ~220 V	 BACKUP BATTERY

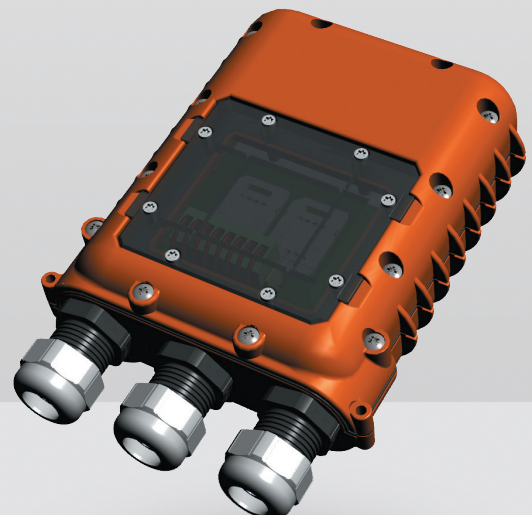

### Key Functions and Features

- support for client and server modes;
- transparent TCP/IP-to-COM mode;
- Modbus RTU, ASCII mode;
- simultaneous operation with four servers;
- support for operation with the backup IP address of the server or the backup server;
- support for backup operation via CSD;
- dual SIM card support;
- sending SMS to a specified number at the loss of connection to the server;
- various modes of operation with the server (permanent connection, connection on schedule, on call or on SMS command);
- automatic status tracking of the GSM module and two types of watchdog timers for protection against hang-up;
- RS485/232, 2 GPIO, 1 GPO interfaces;
- GPIO control via SMS commands or GPRS;
- sending SMS to a specified phone number on GPIO signals;
- easy configuration of multiple modems with similar settings using the Protect Protocol software;
- support for the iRZ Collector specialized server software;
- remote configuration and updating of the firmware when working with iRZ Collector;
- sealed housing (IP68 protected);
- integrated PSU for operation on the industrial power system of ~220V 50/60 Hz;
- support for continuous battery-powered operation

### Hardware Features

- GSM/GPRS module - BGS2
  - Communication interface - RS485/RS232
  - 1xGPO, 2xGPIO
  - Dual SIM card support
  - 3G support\*
  - Support for SIM chip installation\*
- \* optional

### Frequency Bands

- 900/1800 MHz
- 850/900/1800/1900 MHz (optional)

### GSM Module Transmitter Output Power

- at frequency of 1800/1900 MHz - 1 W
- at frequency of 850/900 MHz - 2 W

### Physical Specifications

- Sealed plastic housing
- Protection rating - IP68
- Dimensions (with cable glands), maximum - 146x99x46 mm (LxWxH)
- Weight, maximum - 150 g
- Operating temperature: -40°C to +65°C
- Storage temperature: -50°C to +85°C

### Power Supply

- Integrated PSU
- Power supply voltage - 100 to 240 V
- Input voltage frequency - 50/60 Hz
- Built-in battery capacity - 1200 mAh
- GPIO 1 and GPIO 2 in the "input" mode:
  - Programmable pull-up resistor - 10 k $\Omega$ ;
  - Programmable pull-down resistor - 47 k $\Omega$ ;
  - Maximum "0" level voltage (low level) - 0.8 V
  - Minimum "1" level voltage (high level) - 2.0 V
- GPO 3 in the "output" mode:
  - Output type - open collector to power voltage
  - Output impedance, maximum - 2  $\Omega$
  - Maximum output current - 500 mA

